


## Front Side Door Check Replacement

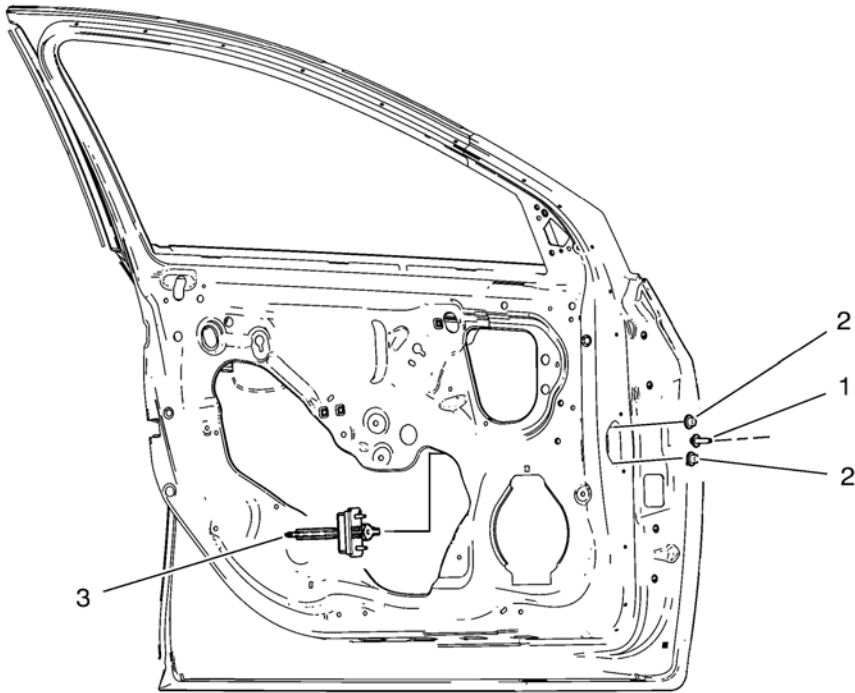

Callout	Component Name
<b>Prliminary Procedure</b>  1. Remove front side door trim panel. Refer to <a href="#">Front Side Door Trim Replacement</a> 2. Remove the front side door water deflector. Refer to <a href="#">Front Side Door Water Deflector Replacement</a>	
1	Front Side Door Check Link Bolt  <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.  <b>Tip</b> Place the door in the full open position.  <b>Tighten</b> 25 N·m (18 lb ft)
2	Front Side Door Check Link Nut  <b>Procedure</b>  Remove the water deflector.  <b>Tighten</b> 9 N·m (79 lb in)
3	Front Side Door Check