


Front Side Door Replacement

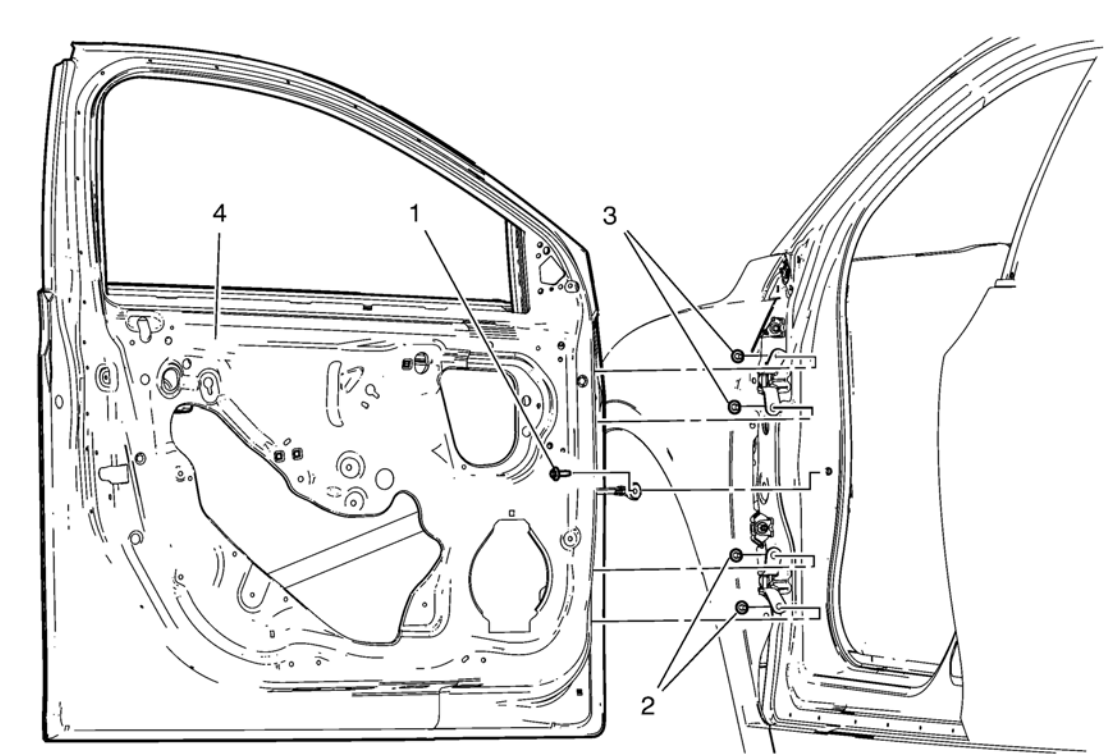

Callout	Component Name
Preliminary Procedure Remove the front side door trim panel. Refer to Front Side Door Trim Replacement .	
1	Front Side Door Check Link Bolt Caution: Refer to Fastener Caution in the Preface section. Procedure 1. Remove the water deflector. 2. Disconnect the door electrical connector. 3. Support the door before removing the hinge bolts. 4. With the aid of an assistant, remove the door. Tighten 25 N·m (18 lb ft)
2	Front Side Door Lower Hinge Bolt (Qty: 2) Tighten 25 N·m (18 lb ft)
3	Front Side Door Upper Hinge Bolt (Qty: 2) Tighten 25 N·m (18 lb ft)
4	Front Side Door Procedure 1. Transfer all of the internal components. 2. Adjust the front side door as needed. Refer to Front Side Door Adjustment .