


Rear Side Door Window Replacement

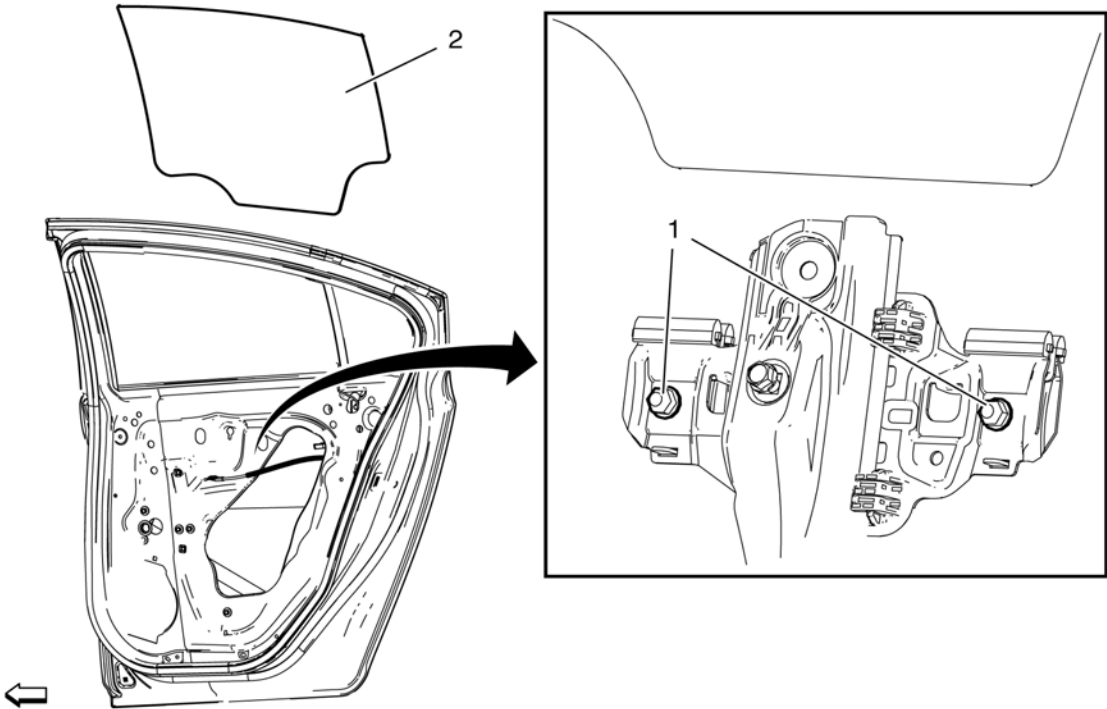

Callout	Component Name
Preliminary Procedures 1. Position the window approximately half way down in the door. 2. Remove the water deflector. Refer to Rear Side Door Water Deflector Replacement . 3. Remove the outer sealing strip. Refer to Rear Side Door Window Outer Sealing Strip Replacement .	
1	Rear Side Door Window Regulator Sash Nut (Qty: 2) Caution: Refer to Fastener Caution in the Preface section. Tighten 9 N·m (80 lb in)
2	Rear Side Door Window Procedure 1. Loosen the window regulator sash nuts, pull upward to release the window from the sash. 2. Rotate the rear door window as necessary to remove it from the door.