


Rear Compartment Lid Emblem/Nameplate Replacement (Cruze - Left Side)

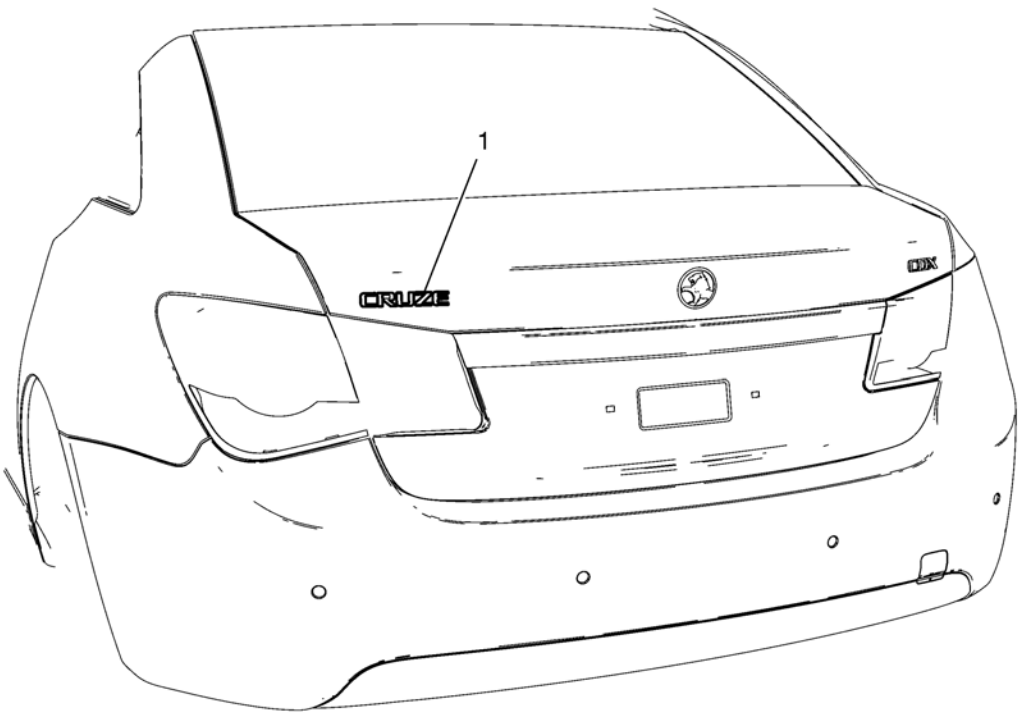

Callout	Component Name
1	<p>Rear Compartment Lid Emblem Assembly</p> <p><b>Caution:</b> Refer to <a href="#">Exterior Trim Emblem Removal Caution</a> in the Preface section.</p> <p><b>Procedure</b></p> <ol style="list-style-type: none"><li>1. The part and surface should be 21°C (70°F) prior to installation. The vehicle should remain 21°C (70°F) for one hour after assembly to allow adhesive to develop sufficient bond strength.</li><li>2. Use a Heat Gun or equivalent to remove the old nameplate. Clean all adhesive from the rear compartment panel and wipe the surface dry with a clean lint-free towel prior to installing the new nameplate.</li><li>3. When removing protective liners from the adhesive tape, be careful not to touch tape with hands and do not allow tape to come in contact with dirt or any foreign matter prior to adhesion.</li><li>4. Close the rear compartment lid prior to adhesion.</li><li>5. Using the palm of the hand, wet out the emblem to the rear compartment lid to ensure full adhesion of the emblem is made.</li></ol>