


1. Install cushion cover (1) to pad (2).
2. Install cushion cover (1) with pad (2) to frame (3).
3. Attach cushion cover (1) from seat frame (3) all the way round.

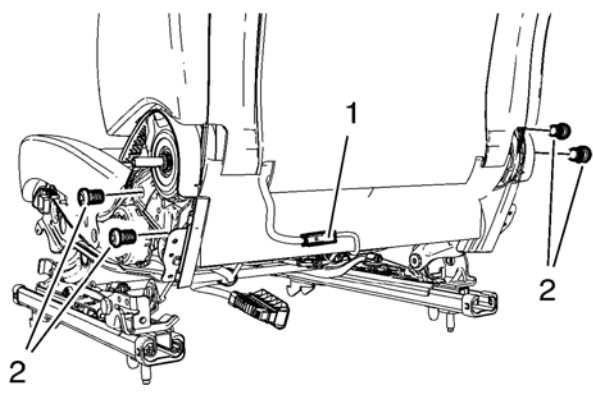

4. Install backrest.

Caution: Refer to [Fastener Caution](#) in the Preface section.

5. Tighten screw (2) (Qty: 4).

Tighten

35 N·m (26 lb ft)

6. Connect and latch wiring harness plug (1), if equipped.
7. Attach cushion cover to backrest below.
8. Install seat cushion outer trim panel. Refer to [Front Seat Cushion Outer Trim Panel Replacement](#).
9. Install seat cushion inner trim panel. Refer to [Front Seat Cushion Inner Trim Panel Replacement](#).
10. Install front seat recliner handle. Refer to [Driver or Passenger Seat Recliner Handle Replacement](#).
11. Install front seat adjuster handle, if equipped.
12. Install driver or passenger seat. Refer to [Driver or Passenger Seat Replacement](#).