


Rear Side Door Upper Hinge and Lower Hinge Replacement

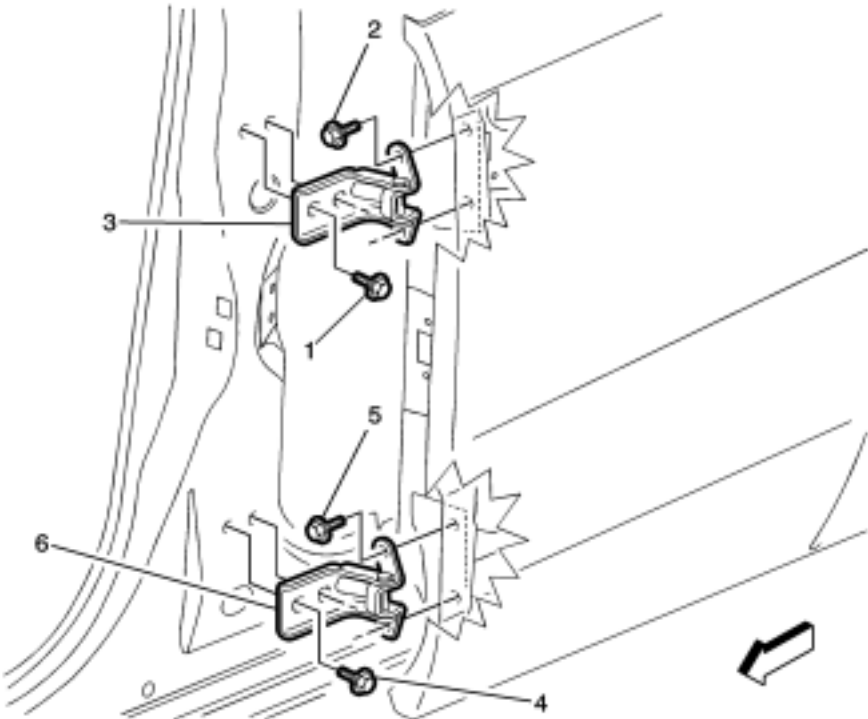

Callout	Component Name
1	<p>Rear Side Door Upper Hinge to Body Bolts (Qty: 2)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> .</p> <p><b>Procedures</b></p> <p>1. Before removing the door, apply a double layer of masking tape around the perimeter of the painted surfaces.</p> <p>2. Mark the location of the hinge being removed.</p> <p>3. Support the door before removing the hinge bolts.</p> <p><b>Tighten</b> 32 N·m (24 lbft)</p>
2	<p>Rear Side Door Upper Hinge to Door Bolts (Qty: 2)</p> <p><b>Tighten</b> 25 N·m (18 lbft)</p>
3	<p>Rear Side Door Upper Hinge</p>
4	<p>Rear Side Door Lower Hinge to Body Bolts (Qty: 2)</p> <p><b>Tighten</b> 32 N·m (24 lbft)</p>
5	<p>Rear Side Door Lower Hinge to Door Bolts (Qty: 2)</p> <p><b>Tighten</b> 25 N·m (18 lbft)</p>
6	<p>Rear Side Door Lower Hinge</p> <p><b>Procedure</b></p> <p>If the door striker needs adjust. Refer to <a href="#">Rear Side Door Lock Striker Adjustment</a> .</p>