

Tail Lamp Pocket Replacement (MIG-Brazing)


Note: According to different corrosion warranties, only the regional mandatory joining methods are allowed.

Removal Procedure

Warning: Refer to [Approved Equipment for Collision Repair Warning](#) in the Preface section.

Warning: Refer to [Glass and Sheet Metal Handling Warning](#) in the Preface section.


1. Disable the SIR System. Refer to [SIR Disabling and Enabling](#).
2. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#).
3. Remove all related panels and components.
4. Visually inspect the damage. Repair as much of the damage as possible.
5. Remove the sealers and anti-corrosion materials from the repair area, as necessary. Refer to [Anti-Corrosion Treatment and Repair](#).

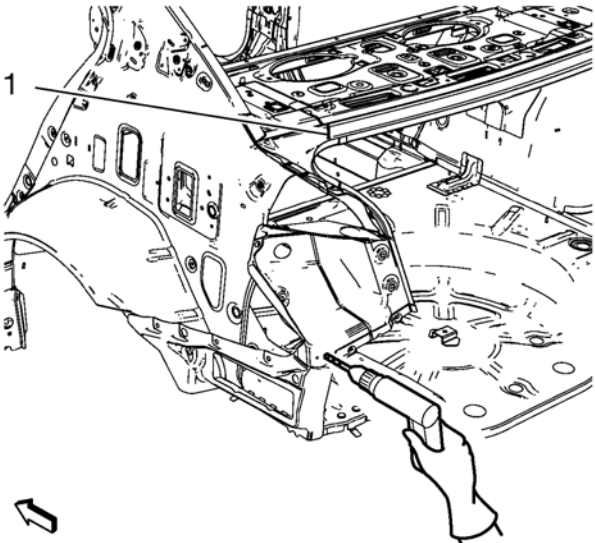

6. Locate and mark all the necessary factory welds of the body rear end panel.

Note: Drill factory welds in area of the rear end upper panel reinforcement (1) from above. Create slots out of the drill holes for later brazing.

7. Drill all factory welds. Note the number and location of welds for installation of the service assembly.

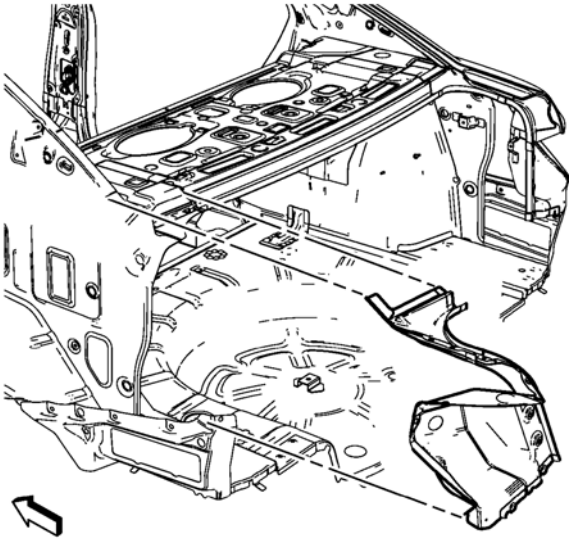

8. Remove the tail lamp pocket.

Installation Procedure

