


3. Position the rear bumper impact bar stud plate on the vehicle.
4. Verify the fit of the rear bumper impact bar stud plate.
5. Clamp the rear bumper impact bar stud plate into position.

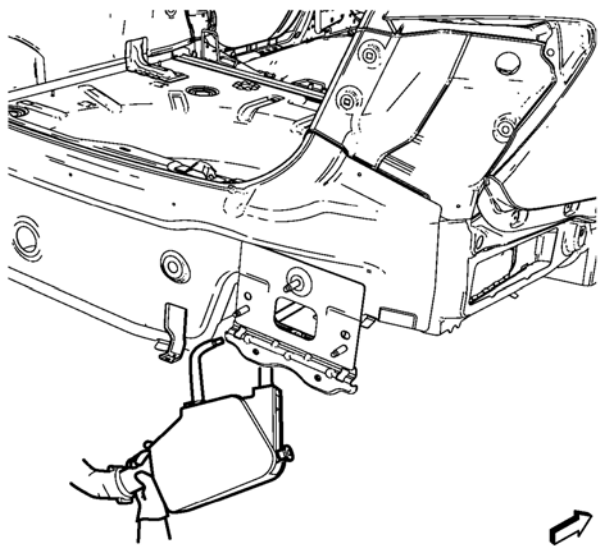

6. Spot weld accordingly.
7. Apply the sealers and anti-corrosion materials to the repair area, as necessary. Refer to [Anti-Corrosion Treatment and Repair](#).
8. Paint the repaired area. Refer to [Basecoat/Clearcoat Paint Systems](#).
9. Install all related panels and components.
10. Connect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#).
11. Enable the SIR system. Refer to [SIR Disabling and Enabling](#).